
## X45 Flagship Sterilizer

Capacity	45 L
nput	220/230V / 50HZ / 2900W
terilization temperature	121°C / 134°C
laterial of chamber	Stainless steel 304
lin install depth	600mm ( depth of disinfection table )
torage water tank	Volume 10L
Vaste water tank	Volume 7L
ock system of door	Automatic door
rying system	Three drying models: Al drying, Presetting drying and Custom drying
utput	Thermo printer, Label printer, SD card
in sterilization time ( B Type)	< 35 min
he noise	The average noise <60 Db ( A )
roduct size	576 * 726 * 646 mm ( WDH )
hamber size	φ 319 * 617 mm
et weight	133 Kg
ross weight	148 Kg



Manufacturer information



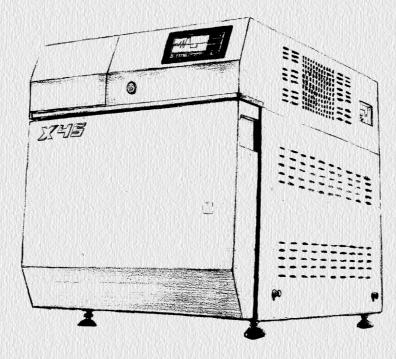

Everything is designed for the professionals

# **Artificial Intelligence drying**

Innovative AI drying method makes the instruments dryer.



# 60 cm **Standard Workbench Dimensions**

Same base space as 22 liter's, users don't have to customize their cabinets, make the disinfection room more spacious.



# 3 Major **Medical Traceable System**



## **Process Parameter Printing**

Complete records of the data in the sterilization process, The printed record can be stuck to record book of sterilizer sterilization cycle.



### **Label Printer**

Sterilization package traceable data printing. The label can be stuck directly to the sterilization package, Completely meet the requirements of sterilization regulations.



### **SD Card**

The sterilization data stored in SD card saved into computer, the sterilization record can be checked any time and never lost.

#### **More Than That:**



35min Complete Class B Sterilization Cycle



Clean water tank and waste water tank designed separately



Less water consumption





Sterilization records can be checked and re-printed at any time



One-key main power switch

