


RCS K FILE

- Simple
- Safe
- Efficient




OPTIONAL MODEL

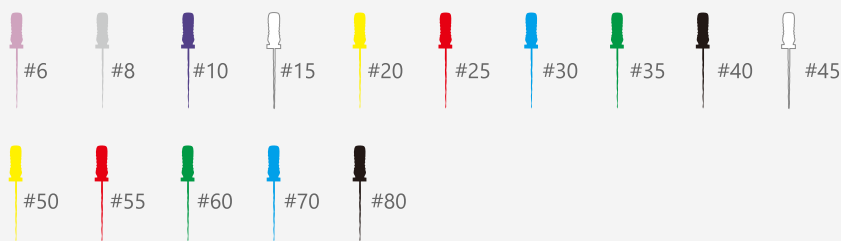


RCS R FILE

- High quality stainless steel.
- Better elasticity, strong cutting ability.
- Excellent corrosion resistance and suitable hardness.



OPTIONAL MODEL

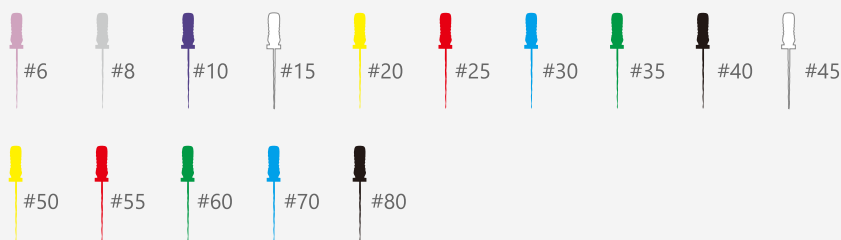

ABSORBENT PAPER POINTS


15

- Highly absorbent.
- Various sizes & tapers.
- Color-coded.
- Rigid enough to insert in canals without curling or bending.



PP.04

PP.VT

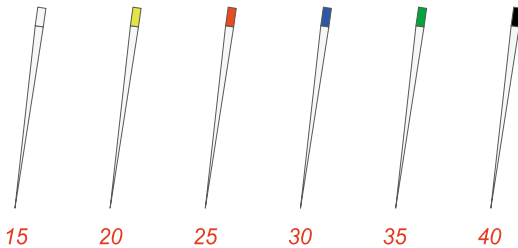

PP.06


GUTTA PERCHA POINTS

16


- Variable tapers & Sizes designed to predictably fit shaped canals.
- Excellent radiopacity.
- Long shelf life.
- Color coded points according to ISO.
- Flexibility for available entrance into tiny and curved canals and completely seals the entire length of the canal.



GP.04

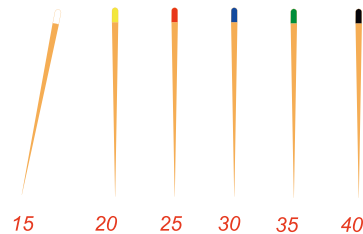



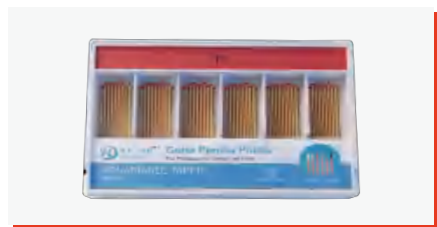



GP.06



GP.VT

FEATURES

-  New colorful screen Touch key.
-  Silver, Champagne gold Zinc magnesium alloy Surface paint technic Fashion and beautiful.
-  High performance lithium battery Super long standby.
-  Intelligent Internet with Endo Smart II Expanding while measuring.
-  Imported chip Ai algorithm Instant calibration.
-  Adjustable viewing angle Metal base Ultrathin body.



TECHNICAL PARAMETER

Battery	CR14500,3.7V 800mAh
Power Adapter	AC100-240V,50/60Hz


Input power	5VA
Screen size	4.0 inch


EP PRO


Real super mini head 6:1
Clearer vision
High-efficiency & Super
silent

Endo motor & Built-in Apex
ACC technic makes
operation simpler and safer



 360° Rotary mini head
Unobstructed view

 Imported chip
Ai algorithm
Smooth and efficient cutting
Accurate to 1°

 Real super mini head 6:1
Clearer vision
High-efficiency & Super silent

TECHNICAL PARAMETER

Contra angle	6: 1
Rotate speed	120~1000rpm
Torque	0.5~4.0 N.cm

Lithium battery	3.7V/1900mAh
Motor	Brushless
Screen	0.96 inch TFT color LCD

PROBE S

19

- High quality stainless steel.
- Comfortable grip, clear product texture.
- High-quality fine steel, high temperature resistance.
- high pressure resistance and high corrosion resistance.
- Not easy to loose, adopt integrated design.

Code	Type	Hole	Color	Length
S-27G-26	Pre-bent	2 holes	Green	26mm
O-27G-26	Straight	2 holes		
S-30G-26	Pre-bent	2 holes		
O-30G-26	Straight	2 holes		
S-27G-22	Pre-bent	2 holes	Yellow	22mm
O-27G-22	Straight	2 holes		
S-30G-22	Pre-bent	2 holes		
O-30G-22	Straight	2 holes		




IMAGE&PACKING



PROBE F

20

- Pre-bent.
- Follow the original root canal morphology.
- 120° angulation.
- 27mm working length.
- 20pcs/box.

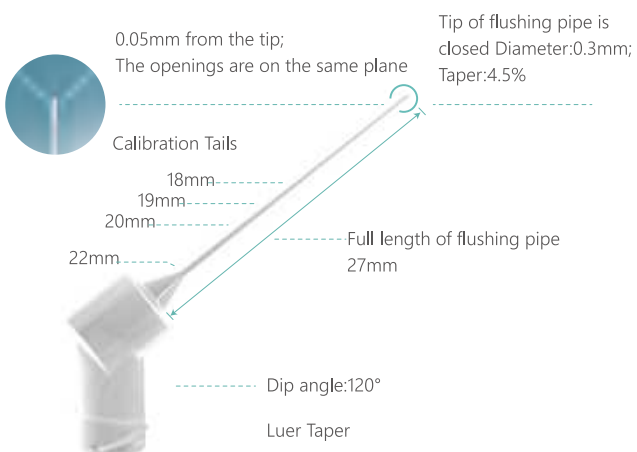


IMAGE&PACKING



RCS PLUGGER

21

- Reprocessable and reusable instrument.
- High resistance to breaking.
- Resistant to high temperature sterilization.
- The surface of the working end is smooth, and the filling will not stick when pressurized.
- Flexible hand plugger for narrow and curved canals.

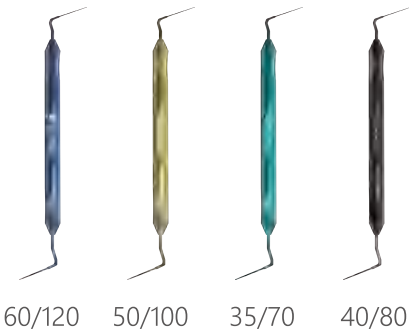

Type specification	Working Tip Type and Size
● PLU-D-V-3570	0.35mm NiTi working tip & 0.7mm stainless working tip
● PLU-D-V-4080	0.4mm NiTi working tip & 0.8mm stainless working tip
● PLU-D-V-50100	0.5mm NiTi working tip & 1.0mm stainless working tip
● PLU-D-V-60120	0.6mm NiTi working tip & 1.2mm stainless working tip

IMAGE&PACKING




ENDO HOLDER

22


- Find the canal faster.
- Easier to negotiate.
- Tissue debridement.
- Fast Glide Path.
- Easy file installation.
- Simply bend the file for optimal passage.




INSTALLATION METHOD




1.Bend the File with Bird Beak Pliers




2.Twist the EndoHolder to Open



3.Insert the File into the EndoHolder



4.Twist to Tighten




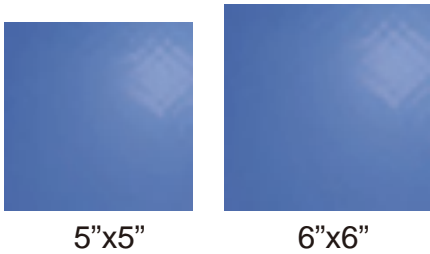
IMAGE&PACKING



RUBBER DAM

- Effective prevention of aspiration and ingestion of debris from instruments, flushes or repair materials.
- Making the healing process faster and easier.


UNIT	(6X6)36PCS		(5X5)52PCS	
THICKNESS	0.18mm	0.22mm		0.28mm
OPTIONAL MODEL				



IMAGE&PACKING



Thickness	Size	Color								
		Baby Blue	Light Blue	Dark Blue	Green	Pink	Black	Orange	Purple	Yellow
0.18mm	5"x5"	RD-BB-18-5*5	RD-LB-18-5*5	RD-DB-18-5*5	RD-Green-18-5*5	RD-Pink-18-5*5	RD-Black-18-5*5	RD-Orange-18-5*5	RD-Purple-18-5*5	RD-Yellow-18-5*5
	6"x6"	RD-BB-18-6*6	RD-LB-18-6*6	RD-DB-18-6*6	RD-Green-18-6*6	RD-Pink-18-6*6	RD-Black-18-6*6	RD-Orange-18-6*6	RD-Purple-18-6*6	RD-Yellow-18-6*6
0.22mm	5"x5"	RD-BB-22-5*5	RD-LB-22-5*5	RD-DB-22-5*5	RD-Green-22-5*5	RD-Pink-22-5*5	RD-Black-22-5*5	RD-Orange-22-5*5	RD-Purple-22-5*5	RD-Yellow-22-5*5
	6"x6"	RD-BB-22-6*6	RD-LB-22-6*6	RD-DB-22-6*6	RD-Green-22-6*6	RD-Pink-22-6*6	RD-Black-22-6*6	RD-Orange-22-6*6	RD-Purple-22-6*6	RD-Yellow-22-6*6
0.28mm	5"x5"	RD-BB-28-5*5	RD-LB-28-5*5	RD-DB-28-5*5	RD-Green-28-5*5	RD-Pink-28-5*5	RD-Black-28-5*5	RD-Orange-28-5*5	RD-Purple-28-5*5	RD-Yellow-28-5*5
	6"x6"	RD-BB-28-6*6	RD-LB-28-6*6	RD-DB-28-6*6	RD-Green-28-6*6	RD-Pink-28-6*6	RD-Black-28-6*6	RD-Orange-28-6*6	RD-Purple-28-6*6	RD-Yellow-28-6*6

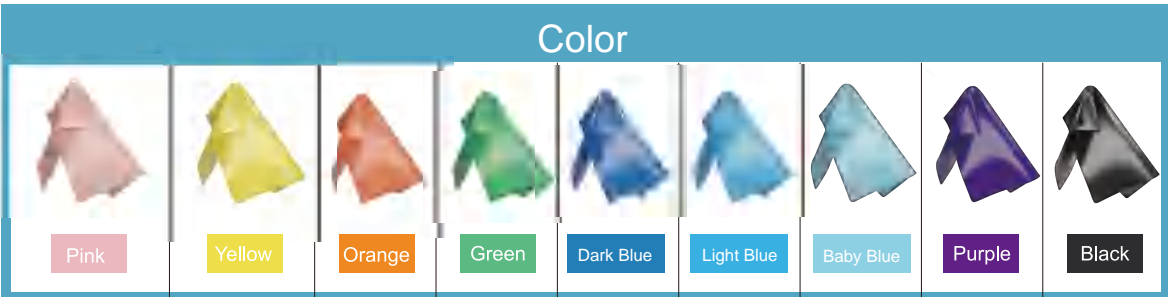

WHIRL FLOW

- Effective removal of dentin debris.
- Sonic powered tips for root canal irrigation
- High frequency oscillation activates the rinsing solution and therefore has a high disinfecting and sterilizing effect.
- High flexibility: Reduces the risk of tip breakage and dentin damage.



IMAGE&PACKING



AIR SCALER

- Appearance Beautiful and Hand feeling comfortable.
- Wider Version and Operation Space due to smaller Body.
- Air drive, and directly connect onto 2/4 hole tube of dental unit, very easy to adjust the air pressure according to all kinds of your requirements.
- Use with WHIRL FLOW for better effect.



IMAGE&PACKING



name	Air Scaler	
Specifications	M4 (4H)	M2 (2H)
connection	4-hole handpiece spiral tube	2-hole handpiece spiral tube
Frequency	From 0 to 10000 Hz	
pressure	0.2-0.32 Mpa (2-3.2kgf/cm2)	
air flow	22 L/Min	23 L/Min
durable temperature	135	
Weight (exclude scaler insert)		64 g (2,1 oz)
Length(exclude scaler tips)	118.5 mm (4,7 inch)	110 mm (4,3 inch)

Integrated Shell Design

1:1 Contra angle

Torque Calibration

Digital OLED Display

Low Noise Motor

Ambidextrous Display



Ultra-reliable Brushless Motor

340 rotatable contra-angle

Front center-of-gravity

Built-in Apex locator

Smooth rotation and lower noise
maketreatment more endurable for
patients

TECHNICAL PARAMETER

Motor handpiece	
Speed	100R/Min - 1000R/Min
Torque	0.5N·cm - 4.0N·cm
Battery	3.7V / 2000mAh

IMAGE&PACKING





Suzhou RAMO Medical Instrument Co., Ltd

Address:No.9, Wengzhuang Road, Shanghu Town, Changshu,
Suzhou City, Jiangsu Province, China.

Web:www.ramomedical.com



Ramo Medical



Ramo_Medical