




Ladders and scaffold systems

NEW



STABILO®
Professional

Telescopic platform ladder SkyMatic



STABILO®
Professional

Telescopic platform ladder SkyMatic

Single-sided, mobile telescopic platform ladder with large platform and all-round platform railing. Safe and comfortable working combined with quick and easy handling.


- + Mobile, height-adjustable aluminium platform ladder according to DIN EN 131-7, single-sided access, with large platform incl. 4-sided platform guardrail for safe and comfortable working
- + Convenient and easy handling – all guardrails and the transition barrier are automatically positioned when the ladder is unfolded
- + Working heights of 2.80 m – 3.30 m can be achieved with the 1 x 3 to 1 x 5 rung version and working heights of 3.30 m – 4.35 m with the 1 x 5 to 1 x 9 version
- + Maximum flexibility and use on stairs and landings thanks to height adjustment from rung to rung on both sides
- + Comfortable and smooth height adjustment thanks to patented ClickMatic-System
- + All-round safe workplace in accordance with TRBS 2121-2 thanks to three-sided platform railing and self-closing transition barrier
- + Platform size 600 x 500 mm made of slip-resistant aluminium profile
- + Smooth-running quick-release fastener on the platform provides additional stability and prevents the ladder from folding up unintentionally
- + 150 mm high toeboard for increased safety (**200% higher** than required by the EN 131-7 standard)
- + Sturdy flanged rung/rail connection with flush transition to the platform
- + Two stable stabilisers with slip-resistant foot caps (SafetyCap)
- + Easy and convenient to move with one hand thanks to two fixed castors integrated into the stabiliser
- + Small stand width, ideal for working close to objects
- + With art.-no. 832948, infinitely adjustable outriggers on both sides ensure even greater stability. From version 1 x 7 rungs the stabilisers must be used
- + Space-saving storage thanks to compact folding dimensions – fixing straps prevent unintentional unfolding
- + Supplied with a suitable Velcro tool bag that can be used anywhere thanks to a removable shoulder strap
- + Pre-equipped with a wosatec QR code label for easy digitalisation of work equipment inspection documentation




Setting up – Unfolding – Ascending


STABILO®
Professional

Installation variants:

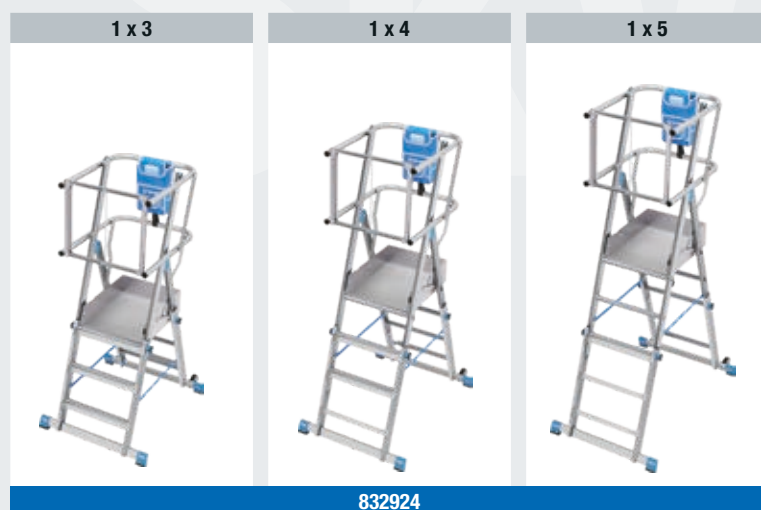

Can be used on stairs and landings thanks to height adjustment on both sides in all variants.

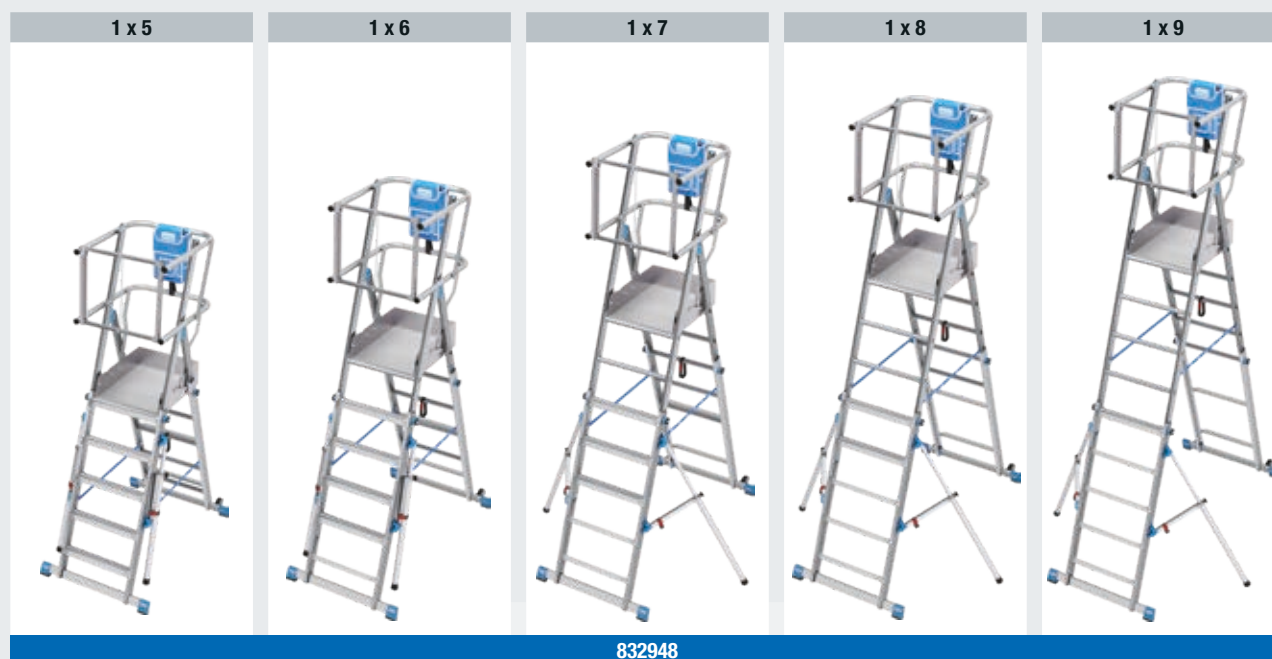


Technical data:

Number of rungs incl. platform				3	4	5	5	6	7	8	9
1		A up to approx.	m	2.80	3.05	3.30	3.30	3.60	3.85	4.10	4.35
		B approx.	m	0.80	1.05	1.30	1.30	1.60	1.85	2.10	2.35
2		C approx.	m	2.00	2.30	2.60	2.60	2.90	3.20	3.45	3.70
		D approx.	m	1.90	2.20	2.45	2.45	2.70	3.00	3.20	3.50
Stabiliser width approx.			m	0.90			0.90				
Floor area B x L approx.			m	0.90 x 1.10	0.90 x 1.30	0.90 x 1.45	0.90 x 1.45	0.90 x 1.65	1.70 x 1.80	1.70 x 2.00	1.70 x 2.20
Product weight approx.			kg	30.0			40.0				
	Width (B) approx.		m	0.90			0.90				
	Depth (T) approx.		m	0.50			0.50				
	Length (L) approx.		m	2.25			2.80				
Art.-No.				832924			832948				


The highlights...



All-round safe workplace thanks to 3-sided railing cage and self-closing transition barrier



600 x 500 mm large, slip-resistant aluminium platform



Extra high toeboard – with 150 mm height 200 % higher than the standard



Space-saving storage:
Separate strap secures against unintentional unfolding



Incl. Velcro tool bag with detachable shoulder strap



Quick-release fastener for additional stability and against unintentional folding



Comfortable, smooth-running height adjustment thanks to the patented ClickMatic-System



Easy to move thanks to integrated castors



Steplessly adjustable outriggers (art.-no. 832948)

